


T-3/4

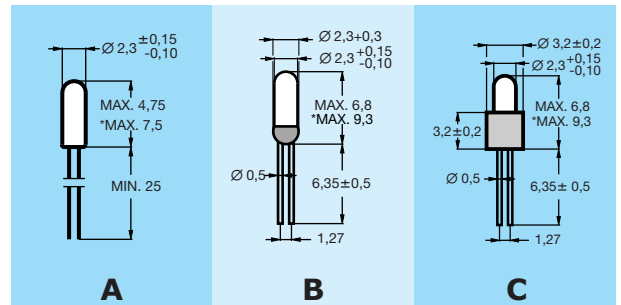


Zeile Line	Nennspannung Design Volts	Nennstrom Design Amps	Lichtstärke Candle Power	Lebensdauer (AC) Life (AC)	Wendelaufbau Filament	A Drahtlampe Standard Wire Terminal standard	B Bi-Pin RM 1,27 integriert Bi-Pin-Modul 1.27 integrated Type BPI	C Bi-Pin Socket GX1,27 Bi-Pin Base GX1.27
No.	[V]	[mA]	[MSCP]	[h]				
1	1,0	40	0,0020	5.000	C-6	4032-00		
2	1,0	45	0,0055	2.000	C-6	4047-00		
3	1,2	45	0,0100	500	C-2R	4051-00		
4	1,5	15	0,0020	500	C-6	4035-00		
5	2,0	50	0,0300	1.500	C-6	4040-00		
6	2,5	250	0,2200	4.000	C-2R	4013-00		
7	4,0	50	0,0250	15.000	C-2R	4043-00		
8	4,0	100	0,1500	4.000	C-2R	4041-00		
9	4,0	115	0,1500	7.000	CC-6	4007-00	4007-01	4007-09
10	5,0	15	0,0200	800	C-2R	4537-00	4537-01	4537-09
11	5,0	15	0,0250	400	C-6	4015-00	4015-01	4015-09
12	5,0	20	0,0030	20.000	C-2V	4038-00 *		
13	5,0	20	0,0150	4.000	C-2R	4039-00		
14	5,0	21	0,0340	1.000	C-2R	4062-00	4062-01	4062-09
15	5,0	45	0,0800	4.000	CC-6	4545-00	4545-01	4545-09
16	5,0	60	0,0300	100.000	C-2R	4064-00	4064-01	4064-09
17	5,0	60	0,0400	60.000	C-2V	4042-00 *		
18	5,0	60	0,0500	100.000	C-2R	4562-00	4562-01	4562-09
19	5,0	60	0,0500	100.000	CC-6	4560-00	4560-01	4560-09
20	5,0	60	0,1500	5.000	C-2R	4070-00	4070-01	4070-09
21	5,0	75	0,0900	40.000	C-2R	4073-00	4073-01	4073-09
22	5,0	75	0,0900	40.000	CC-2R	4575-00	4575-01	4575-09
23	5,0	80	0,1500	6.000	C-2R	4666-00	4666-01	4666-09
24	5,0	115	0,1500	40.000	C-2R	4117-00	4117-01	4117-09
25	5,0	115	0,1500	40.000	CC-6	4115-00	4115-01	4115-09
26	5,0	115	0,2000	8.000	C-2R	4102-00	4102-01	4102-09
27	6,0	25	0,0500	700	C-2R	4010-00	4010-01	4010-09
28	6,0	50	0,0300	25.000	C-2V	4024-00 *		
29	6,0	50	0,0500	15.000	C-2V	4034-00 *		
30	6,0	60	0,0500	50.000	CC-6	4001-00	4001-01	4001-09
31	8,0	50	0,0600	15.000	C-2F	4050-00 *		
32	9,0	30	0,0500	8.000	C-2V	4048-00 *		
33	10,0	15	0,0015	30.000	C-2V	4033-00 *		
34	10,0	50	0,0800	12.000	C-2V	4049-00 *		
35	12,0	25	0,1000	1.000	C-2F	4225-00 *	4225-01 *	4225-09 *
36	12,0	30	0,0300	12.000	C-2V	4029-00 *		
37	12,0	50	0,0700	16.000	CC-2V	4025-00 *		
38	12,0	50	0,1200	10.000	C-2F	4023-00 *		
39	14,0	30	0,0180	20.000	CC-2V	4044-00 *		
40	16,0	20	0,0400	5.000	C-2F	4031-00 *		
41	16,0	30	0,0200	20.000	C-2F	4036-00 *		
42	16,0	30	0,0350	12.000	C-2F	4046-00 *		
43	24,0	15	0,0200	3.000	CC-2V	4037-00 *		
44	24,0	20	0,0350	5.000	CC-2F	4022-00 *		
45	28,0	20	0,0500	6.000	CC-2F	4030-00 *		
46	28,0	20	0,0750	4.000	CC-2F	4020-00 *		
47	28,0	24	0,1500	6.000	CC-2F	4080-00 *	4080-01 *	4080-09 *

C = Sockel-Material/base material ->POLYAMID (GV)

Verwendbare Fassungen/applicable lampholder:
Spalte/column C = MGG 20103-11, MGG 20104-11

T-3/4

TL-3/4

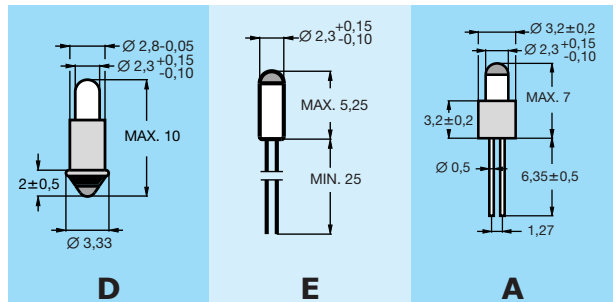

Zeile Line	Nennspannung Design Volts	Nennstrom Design Amps	Lichtstärke Candle Power	Lebensdauer (AC) Life (AC)	Wendelaufbau Filament			
No.	[V]	[mA]	[MSCP]	[h]				
1	1,0	40	0,0020	5.000	C-6		4032-06	
2	1,0	45	0,0055	2.000	C-6		4047-06	
3	1,2	45	0,0100	500	C-2R		4051-06	
4	1,5	15	0,0020	500	C-6		4035-06	
5	2,0	50	0,0300	1.500	C-6		4040-06	
6	2,5	250	0,2200	4.000	C-2R		4013-06	4013-10
7	4,0	50	0,0250	15.000	C-2R		4043-06	
8	4,0	100	0,1500	4.000	C-2R		4041-06	
9	4,0	115	0,1500	7.000	CC-6		4007-06	4007-10
10	5,0	15	0,0200	800	C-2R		4537-06	
11	5,0	15	0,0250	400	C-6		4015-06	4015-10
12	5,0	20	0,0030	20.000	C-2V		4038-06	
13	5,0	20	0,0150	4.000	C-2R		4039-06	
14	5,0	21	0,0340	1.000	C-2R		4062-06	
15	5,0	45	0,0800	4.000	CC-6		4545-06	4545-10
16	5,0	60	0,0300	100.000	C-2R		4064-06	
17	5,0	60	0,0400	60.000	C-2V		4042-06	
18	5,0	60	0,0500	100.000	C-2R		4562-06	
19	5,0	60	0,0500	100.000	CC-6		4560-06	4560-10
20	5,0	60	0,1500	5.000	C-2R		4070-06	
21	5,0	75	0,0900	40.000	C-2R		4073-06	
22	5,0	75	0,0900	40.000	CC-2R		4575-06	4575-10
23	5,0	80	0,1500	6.000	C-2R		4666-06	4666-10
24	5,0	115	0,1500	40.000	C-2R		4117-06	
25	5,0	115	0,1500	40.000	CC-6		4115-06	4115-10
26	5,0	115	0,2000	8.000	C-2R		4102-06	
27	6,0	25	0,0500	700	C-2R		4010-06	4010-10
28	6,0	50	0,0300	25.000	C-2V		4024-06	
29	6,0	50	0,0500	15.000	C-2V		4034-06	
30	6,0	60	0,0500	50.000	CC-6		4001-06	4001-10
31	8,0	50	0,0600	15.000	C-2F		4050-06	
32	9,0	30	0,0500	8.000	C-2V		4048-06	
33	10,0	15	0,0015	30.000	C-2V		4033-06	
34	10,0	50	0,0800	12.000	C-2V		4049-06	
35	12,0	25	0,1000	1.000	C-2F/CC-6		4225-06	4225-10
36	12,0	30	0,0300	12.000	C-2V		4029-06	
37	12,0	50	0,0700	16.000	CC-2V		4025-06	
38	12,0	50	0,1200	10.000	C-2F		4023-06	
39	14,0	30	0,0180	20.000	CC-2V		4044-06	
40	16,0	20	0,0400	5.000	C-2F		4031-06	
41	16,0	30	0,0200	20.000	C-2F		4036-06	
42	16,0	30	0,0350	12.000	C-2F		4046-06	
43	24,0	15	0,0200	3.000	CC-2V		4037-06	
44	24,0	20	0,0350	5.000	CC-2F		4022-06	
45	28,0	20	0,0500	6.000	CC-2F		4030-06	
46	28,0	20	0,0750	4.000	CC-2F		4020-06	
47	28,0	24	0,1500	6.000	CC-2F		4080-06	

F = Sockel-Material/base material ->POLYAMID (GV)

Verwendbare Fassungen/applicable lampholder:
Spalte/column C = MGG 20103-11, MGG 20104-11